



BLOC



		220 240 V 50-60 Hz	LED	SDCM 3	IP 65
CRI 80	EN 62471 RG 0	50000 L80B50	η_{ef} (lm/W) 111-122		

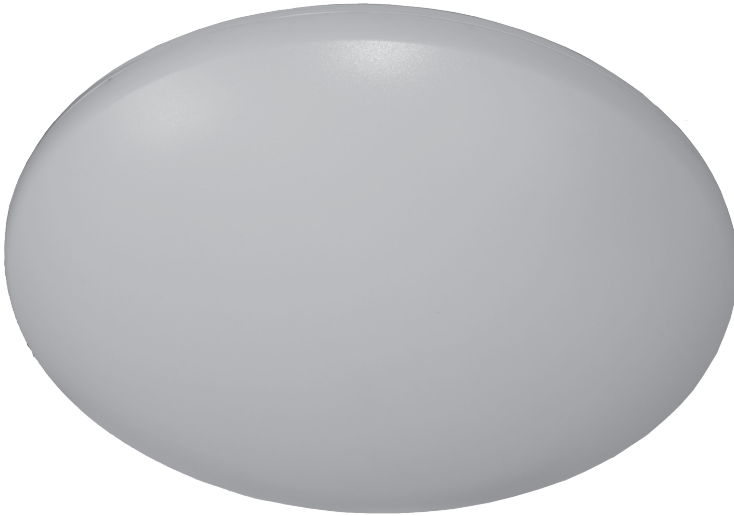


BLO1000KO

Higher IP light fittings

- Body:**
White painted (RAL 9003) metal sheet
- Optic:**
KO - opal polycarbonate cover
- LED:**
Mid Power LED
2...2700K
3...3000K
4...4000K
- Wiring:**
ND - no-dimmable
DALI - dimmable DALI
PIR - integrated pasive presence detector



2200	2700	3000	4000	5700	6500	MIX	RGB	
✗	○	○	●	✗	✗	✗	✗	✗
●	✗	○	✗	✗	○	✗	✗	✗

● default ○ optional ✗ not possible

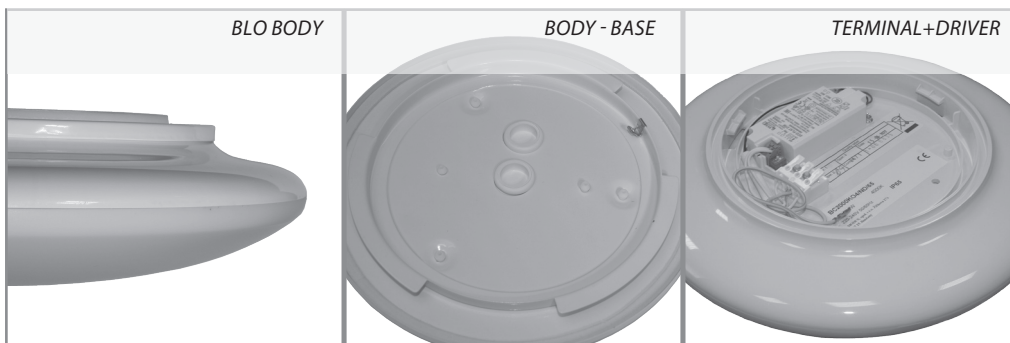

Code: BLO1500KO4ND/IP65

Luminaire type	BLO	1500	KO	4	ND	/IP65
Light output			KO – opal polycarbonate cover	Color temperature: 2 = 2700 K 3 = 3000 K 4 = 4000 K	ND – no-dimmable DALI – dimmable DALI PIR – integrated passive presence detector	/IP65

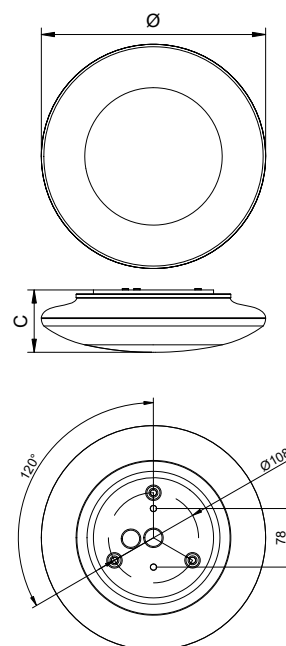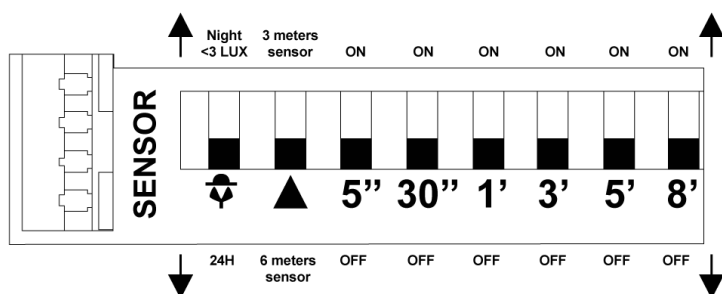

BLO	W	lm	Ø	C	kg
BLO1000KO	9	1 000	300	82	1,3
BLO1500KO	13	1 500			
BLO2000KO	18	2 200			
BLO3000KO	25	3 000			