

Module	W	A	B	X
Small Double	11	675	135	400
Small Double	20			
Medium Simple	20	1275	84	800
Medium Double	40		135	
Medium Double	52			
Large Simple	32	1575	84	1100
Large Double	50		135	
Large Double	68			
Large Double	95			

Nom	W	CRI	K	Driver	Optic	Finition	Module	Largeur	Sensor
DIXENCE	11 <sup>1</sup>	80CRI	3000K	Ecg-fix	Opal	White	Small	Simple 1	HF
	20 <sup>1,2</sup>		4000K	DALI			Medium	Double 2	
	32 <sup>4</sup>		5700K	Wireless			Large		
	40 <sup>3</sup>		6500K						
	50 <sup>5</sup>								
	68 <sup>5</sup>								

<sup>1</sup>only small double / <sup>2</sup>only medium simple / <sup>3</sup>only medium double / <sup>4</sup>only large simple / <sup>5</sup>only large double

Code ordering example: **DIX2084DOWM1-H**

Finition:




# DIXENCE

**Montage:** Plafonnier apparent/Suspendu  
**Système optique:** diffuseur opal polycarbonate / diffuseur semiopal PMMA  
**Équipement électrique:** Ballast électronique FIX/DALI (ECG/EDA)  
**Matériels:** Corps: Polycarbonate / PMMA. Embouts: PS / Polycarbonate. Base: Steel  
**Finition:** Base: blanc RAL 9003 (W03)  
**Accessoires non-inclus:** Kit suspension universel, Grille de protection  
**Accessoires inclus :** crochets de suspension, clips de fixation  
**Durée de vie utile:** 80000 heures L80/B50

**Montage:** Deckenleuchte/Hängend (S/S)  
**Optisches System:** Diffusor opal aus Polycarbonat / Diffusor Halbopal aus PMMA  
**Vorschaltgerät:** Elektronisches Vorschaltgerät FIX/DALI (ECG/EDA)  
**Material:** Polycarbonat oder PMMA  
**Zubehör nicht enthalten:** universelles Aufhängeset, Schutzgitter  
**Zubehör enthalten :** Aufhängehaken, Befestigungsclips  
**Lebensdauer:** 80000 Stunden L80/B50

**Mounting:** Surfaced/Suspended (S/S)  
**Optical system:** polycarbonate opal diffuser / PMMA semiopal diffuser  
**Wiring:** Electronic control gear FIX/DALI (ECG/EDA)  
**Materials:** polycarbonate or PMMA  
**Accessories not included :** universal hanging kit, protective grid  
**Accessories included :** suspension hooks, fixation clips  
**Service lifetime:** 80000 hours L80/B50

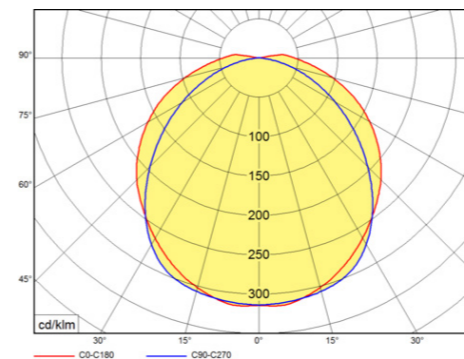

INDUSTRIEL / INDUSTRIAL / INDUSTRIEL Armature IP / Batten IP / Lichtleiste IP