
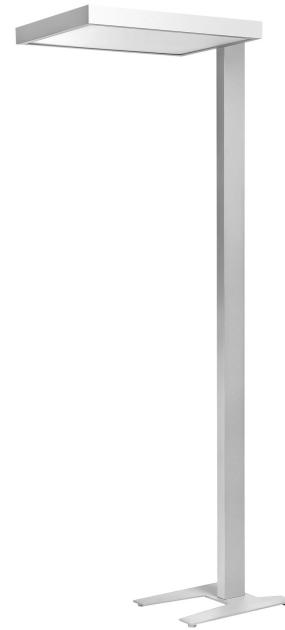


MIMOSA

MOUVABLE

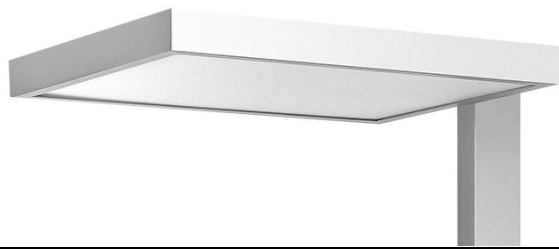

5 years warranty

100'000H
L80/B10
Ta=25°C

220-240V
50-60Hz



MIMOSA IP20

Movable

LIGHT OUTPUT

up to 13370 lm

EFFICIENCY

up to 122 lm/W

WIRING

DALI
Supplied with CASAMBI

CCT

3000 - 4000 - 5000K

CRI

≥ 90 Ra

MATERIALS

Alu

> Housing

RAL9003 - RAL9005 - RAL9006

> Diffuser

MICROPRISM



LIGHT DISTRIBUTION

Direct/Indirect






RAL9003

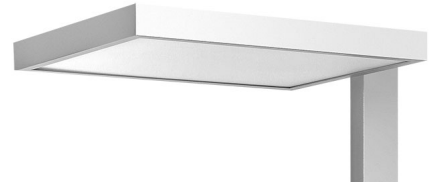

RAL9006



RAL9005



(mm)	A	B	C
	590	320	30